

PIXEL MODULE SERIES | WHITE SIGNAGE

The SMX60 is a compact, high-performance white-only LED module for signage, light boxes, and shallow illuminated surfaces. Its integrated lens ensures consistent light diffusion, even in tight or low-profile applications.

With IP68 protection, UV-resistant housing, and simple on/off operation via PWM control, the SMX60 delivers clean, uniform white output and reliable outdoor performance.

Modules can be individually cut, mounted with adhesive or screws, and are ideal for depth-critical installations from 10-25cm.



At a glance

Emitters

White (W = 2200K, 2700K, 3000K, 4000K, 6000K, 7000K)

3000K

4000K

5000K

7000K

9000K

10000K

SMX Run

15425.0 [607.28]

203.0 [7.99]

MAX=75 pcs

Controls

Wattage

White (1.2W/3pc)

Protection

Ingress - IP68

Temperature

-20°C to 60°C
-4°F to 140°F

Optics

180°

Dimensions

60.0 [2.36]

16.0 [0.63]

3.30 [0.13]


FIXTURE PRODUCT CONFIGURATOR

Prefix	Model	LED Qty/pc	LED Colour	White CCT	Control	Mounting
SMX	60 - 60mm	3 - 3 Qty/pc	W - White - (2800K - 12000k)	28K - 2800K 32K - 3200K 47K - 4700K 60K - 6000K 74K - 7400K 90K - 9000K 10k - 10000k 12k - 12000k	P - PWM	AD - Adhesive Tape S - Screws

EXAMPLE: SMX - 60 - 3 - W - 60K - P - AD

PIXEL MODULE SERIES | WHITE SIGNAGE


FIXTURE SPECIFICATIONS

ELECTRICAL	POWER CONSUMPTION OPERATING VOLTAGE OPERATING TEMPERATURE STORAGE TEMPERATURE	White (1.2W/3PC) 24V DC -20°C TO 60°C (-4°F TO 140°F) -20°C TO 70°C (-4°F TO 158°F)
PHYSICAL	STANDARD FIXTURE DIMENSIONS LED QTY/PCS CRI IP RATING MOUNTING OPTIONS MAX RUN (PCS) SPACING	L: 60MM – W: 16MM – H: 9.8MM 3 LEDS 80+ IP68 ADHESIVE TAPE, SCREWS 75PCS 203MM (CENTRE TO CENTRE)
OPTICAL	BEAM ANGLE COLOUR RANGE LUMINOUS FLUX (LM(PC)) LED TYPE	180° WHITE (2800K, 3200K, 4700K, 6000K, 7400K, 9000K, 10000K, 12000K) 110LM/PC SMD LEDS
DIMMING & CONTROL	CONTROL PROTOCOLS	PWM ON/OFF
FIXTURE RATING & CERTIFICATIONS	CE / IP68	 
LIMITED WARRANTY	5 YEARS <small>*Extendable warranty available</small>	


PIXEL MODULE SERIES | WHITE SIGNAGE

FIXTURE DIMENSIONS

SIGNAGE WHITE MODULE DIMENSIONS

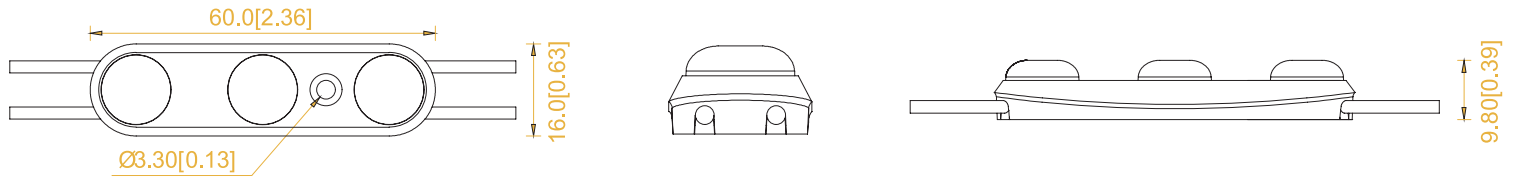

SIGNAGE WHITE MODULE MAX RUN

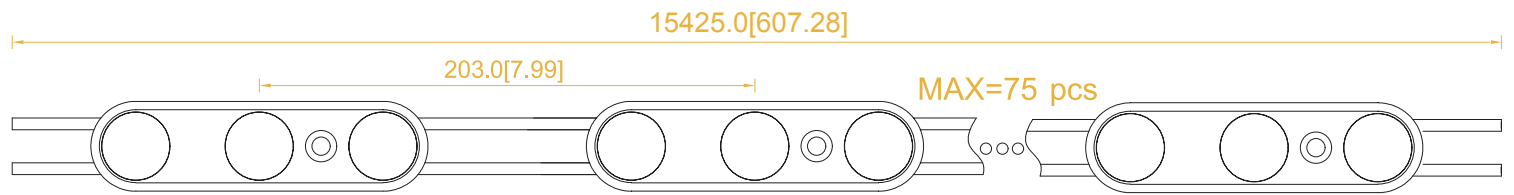

Note:
Dimensions tolerance: ± 0.2 mm length, height and width


INSTALLATION REFERENCE

SIGNAGE MODULE INSTALLATION

Model No.	Surface Material	Depth(H)cm	Illumination(lux)	Evenness	Density (pcs/m ²)	Spacing (X*Y)cm	Watt Density (W/m)	Visual Effects
SMX60	White Soft Film	5	13300-15640	0.85	12*12	8*8	173	OK
		6	8220-9670	0.85	10*10	10*10	120	
		8	4830-5780	0.84	8*8	12*12	77	
		10	3640-4260	0.85	7*8	14*12	67	
		12	3110-3480	0.89	7*8	14*12	67	
		15	2360-2590	0.91	7*8	14*12	67	
		18	1960-2120	0.92	7*8	14*12	67	


Note:

1. X indicates the horizontal center spacing between modules;
2. Y indicates the longitudinal center spacing between modules;
3. Single LED modules are arranged in a square, X= Y.
4. When the depth of light box H>18cm, use more products to satisfy Illumination demand
5. Please contact the sales for other data.
6. Customised wire length available.
7. The above data is for common demand , you can increase the density for actual demand.




FIXTURES LUMINOUS CHARACTERISTICS

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

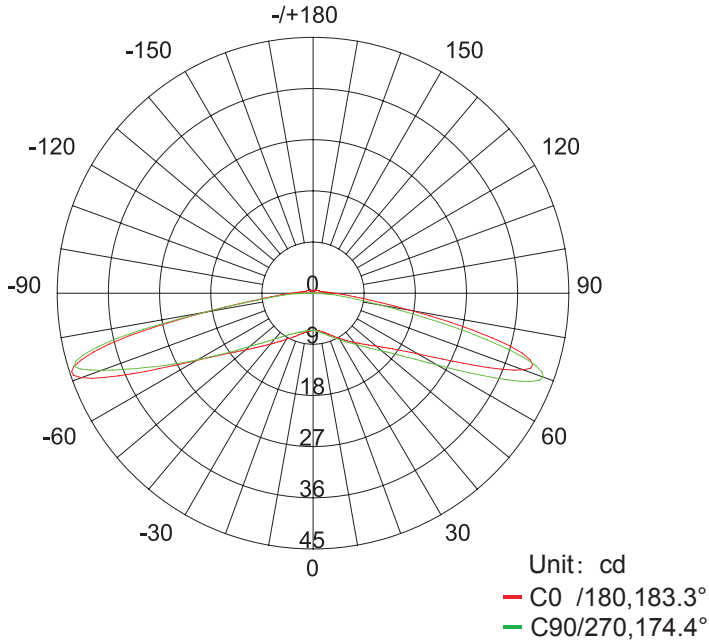

AVERAGE BEAM ANGLE(50%): 178.8°

AVERAGE BEAM ANGLE

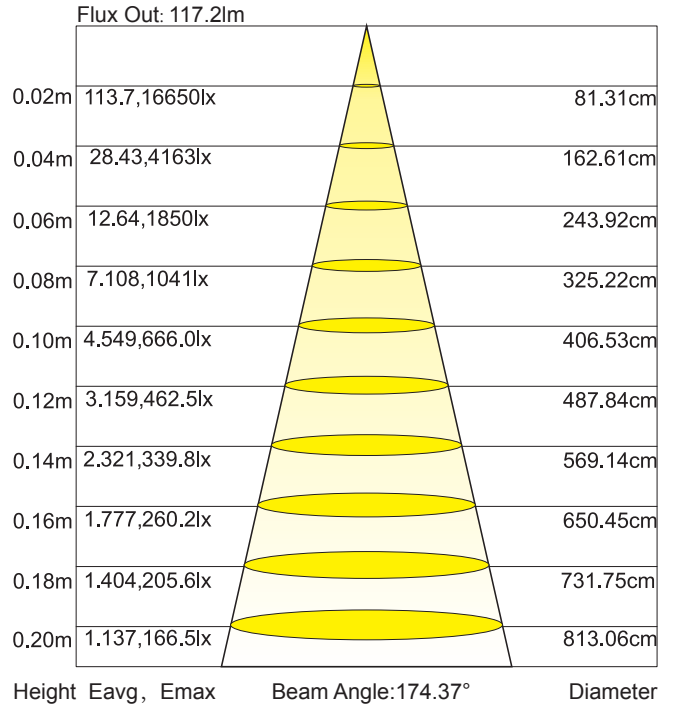

WIRING CONSIDERATIONS

TYPICAL SYSTEM WIRING DIAGRAM

