

BXS72

SPOTLIGHT SERIES

EXTREME OUTPUT

DATASHEET
SPECIFICATIONS

The BXS 72 is the flagship high-output LED spotlight in the BX Beam Range, engineered for demanding architectural, landscape, façade, and public space applications requiring exceptional illumination and long-throw performance.

Featuring multiple colour engines, a powerful optical system, and a wide selection of interchangeable lenses and accessories, it delivers outstanding lumen output, precise beam control, and exceptional reliability across large-scale lighting installations.

Constructed from die-cast aluminium and rated IP66, the BXS 72 is built to withstand harsh outdoor environments while providing consistent, long-term performance in the most demanding applications.



At a glance

Emitters

RGBW

(W = 2400K, 2700K
3000K, 3500K, 4000K
5000K, 6000K)

OR

RGB

OR

Dynamic White (DW)

(2000K to 5000K)

OR

White

(2400K, 2700K
3000K, 3500K, 4000K
5000K, 6000K)

Controls

X-Stream

Voltage

100-240V
AC

Protection

Ingress – IP66

Impact – IK07

Temperature

-20°C to 50°C
-4°F to 122°F

Fixture Options

253.0

Ø180.0

Optics

10° 25° 40°

Mount Dimensions

85.0

50.0

FIXTURE PRODUCT CONFIGURATOR

Prefix	Model	LED Colour	White CCT	Control	Beam Angle	Voltage	Snoot Options	Housing Colour	Mounting
BXS	72	RGBW DW – Dynamic White (22K - 50K) W – White (24K - 60K)	24K – 2400K 27K – 2700K 30K – 3000K 35K – 3500K 40K – 4000K 50K – 5000K 60K – 6000K	D – DMX S – SPI P – PWM X – X-Stream XB – X-Stream Booster	10 – 10° 25 – 25° 40 – 40°	AC – 100-240 V AC	HS – Half Snoot FS – Full Snoot NS – No Snoot	A – Aluminium C – Custom RAL	B – Bracket

EXAMPLE: BXS –72 – RGBW – 27K – D – 10 – AC – HS – A – B

Note*:
XB Booster lives in the inside of the product. Refer to PXT/R page for differences between X and XB.
Need an external controller to run on PWM

X

LED
CTRL

WWW.LEDCTRL.COM

LED CTRL, 1/483 BALMAIN
LILYFIELD, NSW 2040, AUSTRALIA

SPECIFICATIONS SUBJECT TO CHANGE
WITHOUT NOTICE. VISIT WWW.LEDCTRL.COM
FOR THE MOST CURRENT SPECIFICATIONS.
LED CONTROL PTE LTD UEN 201923077G
© 2025 LEDCTRL. ALL RIGHTS RESERVED.

1 | 7

SPOTLIGHT SERIES


EXTREME OUTPUT

FIXTURE SPECIFICATIONS


ELECTRICAL	POWER CONSUMPTION OPERATING VOLTAGE OPERATING TEMPERATURE STORAGE TEMPERATURE	72W 100-240V AC INPUT -20°C TO 50°C (-4°F TO 122°F) -40°C TO 70°C (-40°F TO 158°F)
PHYSICAL	STANDARD FIXTURE DIMENSIONS STANDARD FIXTURE WEIGHT LENS HOUSING COLOUR FINISH IK RATING IP RATING SOURCE LIFE MOUNTING OPTIONS CONNECTION SNOOT OPTIONS	Ø: 180MM X 180MM (H) 6.2KGS TEMPERED GLASS DIE-CAST ALUMINIUM, CUSTOM RAL ANODISED BRUSHED ALUMINIUM, CORROSION RESISTANT IK07 IP66 50,000 HOURS/L70 AT 25° BRACKET 6-PIN CABLE WITH TERMINAL CONNECTOR HALF SNOOT, FULL SNOOT
OPTICAL	BEAM ANGLE COLOUR RANGE ACCURATE COLOUR CONTROL LED TYPE LIGHT SOURCE LUMINOUS FLUX	10° • 25° • 40° WHITE (2700K, 3000K, 3500K, 4000K, 5000K, 6000K, 6500K), RGB, DYNAMIC WHITE (2000K – 5000K) RGBW CONFIGURATIONS WITH SELECTABLE CCT MULTI-DICE LEDS 7PCS 2850LM (RGBW FULL ON 10DEG)
DIMING & CONTROL	CONTROL PROTOCOLS DIMMING RESOLUTION	X-STREAM PROTOCOL WITH DATA REDUNDANCY AND SPI, DMX 8 BIT RESOLUTION DOING 65536 STEP WITH BUILT-IN GAMMA 2.2, 12-BIT, 14-BIT, 16-BIT.
FIXTURE RATING & CERTIFICATIONS	CE / IP66 / IK07	CE IP66 IK07
LIMITED WARRANTY	5 YEARS *Extendable warranty available	5

FIXTURE DIMENSIONS

BXS72 DIMENSIONS – NO SNOOT (WITH BRACKET)

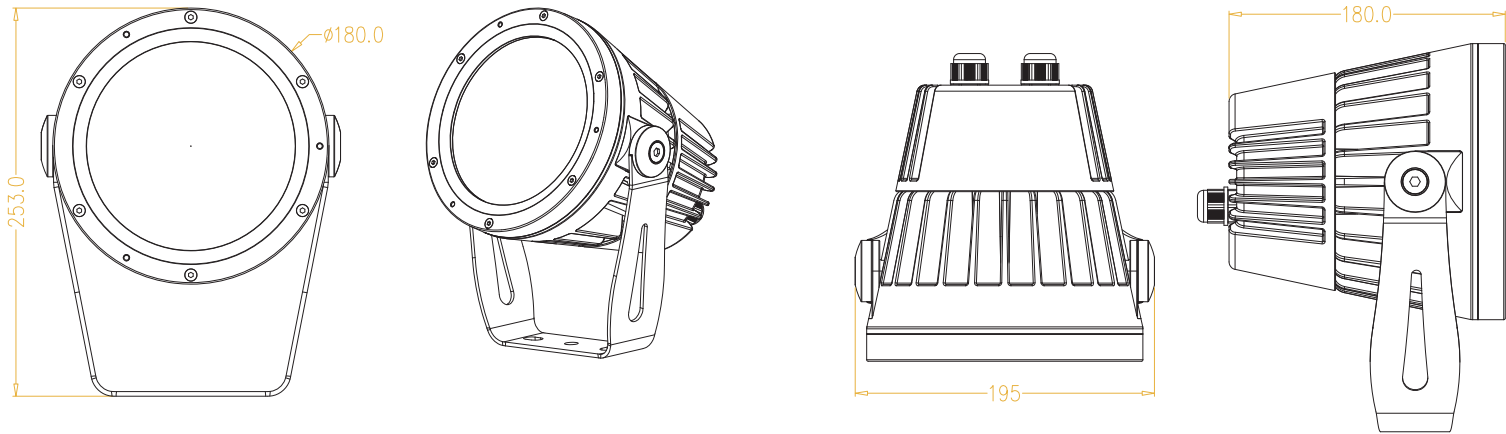


BXS72 DIMENSIONS – HALF SNOOT (WITH BRACKET)

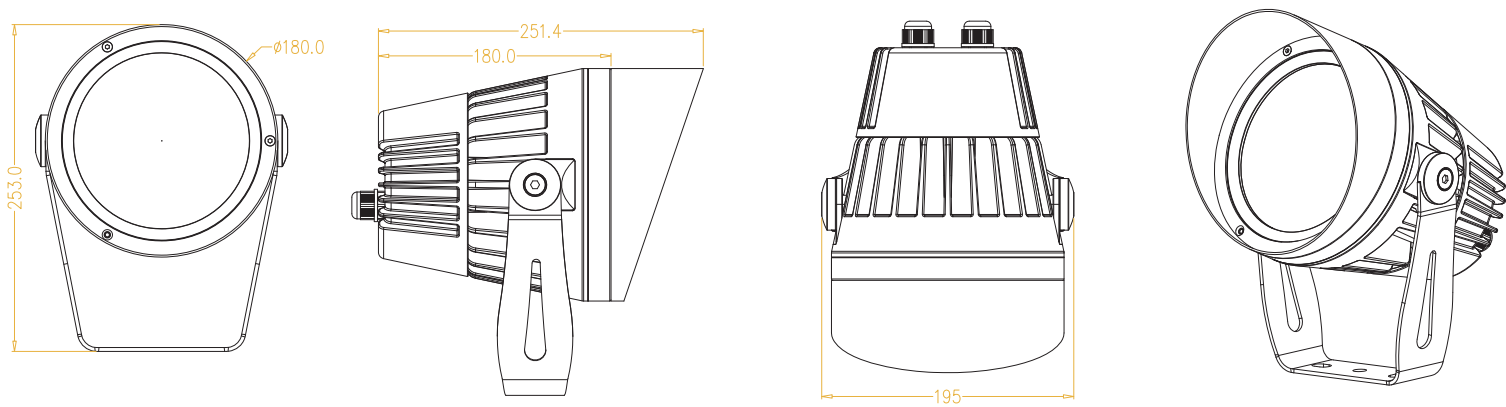


SPOTLIGHT SERIES | EXTREME OUTPUT

CABLES AND CONNECTORS


6-PIN AC/DMX LINKING CABLE

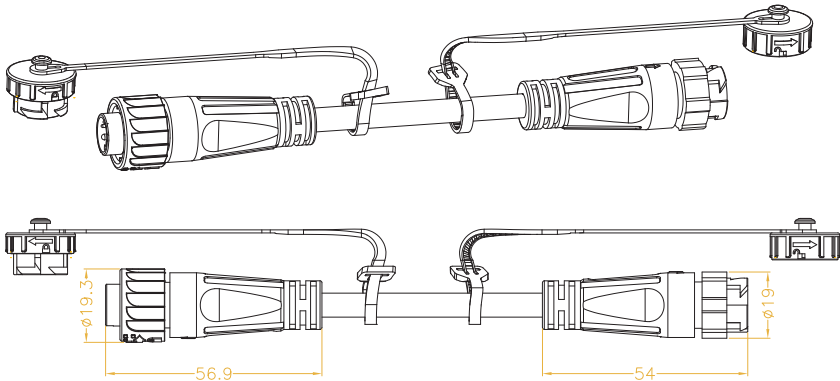

6-PIN AC/DMX T-CABLE

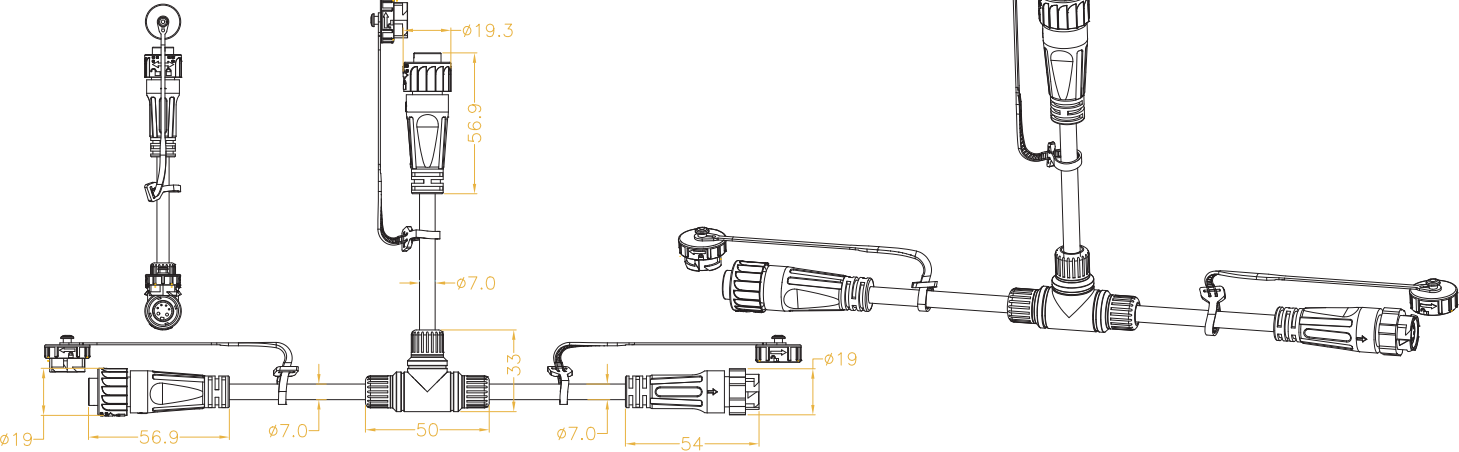

6-PIN AC/DMX IP CONNECTOR

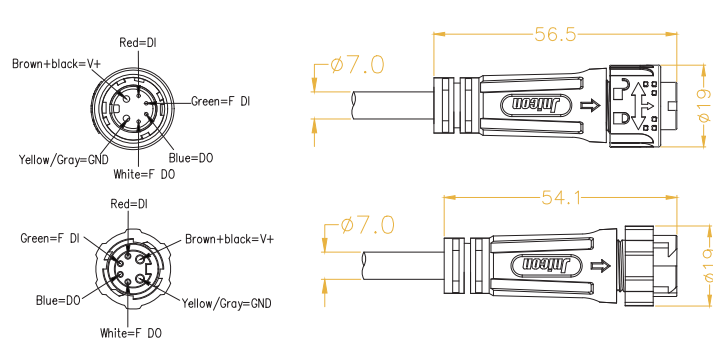


SPOTLIGHT SERIES | EXTREME OUTPUT

PXT/R BOOSTERS

The PXT and PXR work together as a transmitter/receiver pair to allow you to extend SPI signals up to 100 metres. The units convert the standard API signal to/from a differential pair to allow the signal to travel this distance while minimising interference

Wide input voltage range allows support for many LED products, and the compact size makes it easy to accommodate in installations.

D1 and B1 inputs support standard data (D1) and backup data (B1) for pixel protocols supporting data redundancy.

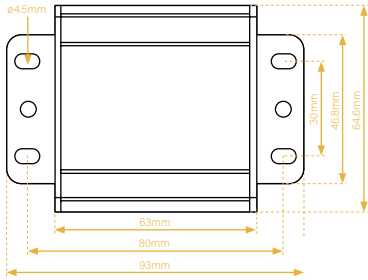

PXT TRANSMITER	INPUT VOLTAGE AMP INPUT OUTPUT IP RATING	12V – 48V DC 6A MAX SPI OR X-STREAM FROM CONTROLLER OR LEDS X-STREAM DIFFERENTIAL SIGNAL IP20
PXT RECEIVER	INPUT VOLTAGE AMP INPUT OUTPUT IP RATING	12V – 48V DC 6A MAX X-STREAM DIFFERENTIAL SIGNAL SPI OR X-STREAM TO LEDS IP20

X-STREAM® COMMUNICAITON OPTIONS

X-Stream® technology is LED CTRLs premium communication platform, delivering high-speed data transmission, intelligent redundancy, and exceptional signal integrity across large-scale lighting installations. It is available in two configurations to suit different installation requirements.

X – X-Stream (EXTERNAL)

In the standard X-Stream configuration, all communication hardware sits outside the fixture. A PXT (Transmitter) and PXR (Receiver) pairs is mounted externally, converting the standard SPI signal to a differential pair for long-distance, interference-resistant data transmission.

- Communication distance up to 100 metres between fixtures.
- D1 and B1 inputs support standard and backup data for full signal redundancy.
- Wide input voltage range for compatibility across the LED CTRL product ecosystem.
- For longer runs, additional pXT/PXR pairs can be added at intervals to maintain signal integrity.
- Best suited for installations where external access to communication hardware is preferred, or where fixtures do not support internal integration.

XB – X-Stream Boosted (INTEGRATED)

X-Stream Boosted moves the signal repeating capability inside the fixture run, eliminating external hardware and simplifying installation. An external PXT transmits the signal to a PXR housed inside the product, which receives, processes, and re-transmits via a built-in PXT to the next fixture – effectively turning each boosted point into a signal relay

- Eliminates external junction boxes and separately mounted communication hardware.
- Each boosted point fully regenerates the signal, preventing degradation over distance.
- Supports extended runs without compromising data quality
- Cleaner installation with fewer visible components.

Integration depends on the product:

- High refresh rates (up to 16 kHz) furthr ensure stable, flicker-free performance and accurate colour rendering.
- Factory-integrated (e.g. LXB): The PXT/PXR hardware is built directly into the fixture, no additional components required.
- Dedicated boost housing (e.g. PUX): A purpose-built fixture shell, identical in form but wihtout LEDs, houses the PXT/PXR pair. Placed at the beginning of each run and at intervals along longer runs, it integrates seamlessly without disrupting the visual continuity of the installation.

Both configurations share the same underlying X-Stream platform, ensuring identical signal quality, redundancy, and compatibility with LED CTRL controllers and fixtures.

SPOTLIGHT SERIES | EXTREME OUTPUT

X-STREAM® TECHNOLOGY

X-Stream® Technology is LEDCTRL's premium communication and power delivery platform, built on the advanced UCS7604 driver IC. It is designed to deliver high speed data transmission, exceptional reliability, and superior visual performance across large-scale and demanding lighting installations.

At its core, the system integrates intelligent signal processing, high-precision constant current control, and advanced error-detection mechanisms to ensure stable operation and consistent output, even in complex or long-distance configurations.

KEY FEATURES

Built-in Redundancy

X-Stream® incorporates dual-channel signal transmission with intelligent fault detection. In the event of a pixels or signal failure, the system automatically bypasses the faulty node and continues data transmission without interruption.

- Dual signal channels with real-time monitoring
- Automatic switching between channels in case of failure
- Fault identification accuracy greater than 99%
- No visible disruption during signal switching

This ensures continuous operation and eliminates single-point failures across the installation.

Auto-Addressing

Fixtures require no manual addressing or pre-configuration. Each unit automatically interprets incoming data, allowing for flexible installation and simplified maintenance.

- Plug-and-play installation
- No addressing sequence required
- Fixtures can be installed in any order

This significantly reduces installation time and minimises the risk of configuration errors.

High-Speed Communication

X-Stream® supports high-speed PWM data transmission, enabling smooth and dynamic lighting effects across long runs.

- Transmission speeds: 800 Kbps and 1.6 Mbps
- Supports high frame rates and fast data refresh
- Capable of filming environments up to 533 FPS without flicker
- Stable performance regardless of frame frequency

This ensures high-quality visual output suitable for media façades, dynamic content, and camera-facing applications.

Advanced Dimming Performance

The system supports multiple dimming resolutions, delivering precise brightness control and smooth transitions across the full output range.

- 8 / 12 / 14 / 16-bit dimming options
- Up to 65,536 levels of greyscale
- Built-in gamma correction (8-bit to 16-bit equivalent)
- Seamless dimming from 0% to 100%

High refresh rates (up to 16 kHz) further ensure stable, flicker-free performance and accurate colour rendering.

Signal Integrity & Reliability

X-Stream® integrates advanced anti-interference and signal enhancement technologies to maintain reliable communication in challenging environments.

- S-AI anti-interference technology reduces radiation and conduction interference
- Enhanced signal receiving and transmission stability
- Consistent performance across varying environmental conditions
- Extended standard spacing between fixtures (>15 m)

These features ensure robust operation in large-scale and electrically complex installations.

Data Booster Technology

To support extended installation distances, X-Stream® incorporates data boosting capabilities both within fixtures and via external booster units.

- Extends communication distance up to 100 m between fixtures
- Maintains signal integrity over long data runs
- Supports large-scale linear and distributed installations

This allows for greater design flexibility without compromising system performance.

Long-Distance Power Distribution

X-Stream® systems are designed to support extended power runs through intelligent power management and integrated hardware.

- AC fixtures with built-in, replaceable power supplies
- High power factor for efficient energy distribution
- Managed startup and inrush current control
- Smart load regulation for stable operation
- Supports continuous runs of up to 96 m of linear product

This ensures reliable power delivery across extended fixture runs while maintaining system safety and efficiency.

System Overview

By combining high-speed communication, intelligent redundancy, and advanced signal processing, X-Stream® Technology enables the creation of large-scale, high-performance lighting systems with minimal installation complexity and maximum operational reliability.

Its integration of the UCS7604 chipset ensures that each fixture operates with precision, consistency, and resilience, making it suitable for demanding architectural, façade, and media lighting applications.

WIRING DIAGRAM

