

DOWNLIGHT SERIESMODULAR PIXEL DOWNLIGHT

The DMX Series is a modular architectural downlight system designed for dynamic, pixel-controlled illumination across retail, hospitality, and façade applications. Available in Ø40mm (5W), and Ø60mm (10W) formats.

Utilising 4-in-1 RGBW LEDs with LEDCTRL's X-Stream technology, the DMX enables high-speed, reliable SPI control for precise pixel mapping and seamless synchronisation accross installations.

A modular optical system with interchangeable lenses allows for tailored beam control, from focused accents to soft ambient lighting.



At a glance

Emitters

RGBW
(W = 2400K, 2700K, 3000K, 3500K, 4000K, 5000K, 6000K)

Housing Colours

ALUMINIUM
WHITE
BLACK
CUSTOM RAL

Connector/Cable Specs

Black Cable (V+)
White Cable (W-)
Yellow Cable (B-)
Green Cable (G-)
Red Cable (R-)

Controls

X-Stream

Voltage

24V DC
Downlight
Driver

Protection

Ingress – IP20
Impact – IP44

Temperature

-20°C to 50°C
-4°F to 122°F

Optics

15° Direct View
24° Direct View
36° Direct View

Dimensions

FIXTURE PRODUCT CONFIGURATOR

Prefix	Model	Diameter	LED Colour	White CCT	Control	Beam Angle	Power	Voltage	Housing Colour
DXM	5 10	40 – Ø40mm 60 – Ø60mm	RGBW	24K – 2400K 27K – 2700K 30K – 3000K 35K – 3500K 40K – 4000K 50K – 5000K 60K – 6000K	X – X-Stream	15 – 15° 24 – 24° 36 – 36°	5 – 5W 10 – 10W	24 – 24VDC	A – Aluminium B – Black W – White C – Custom RAL *eg. C – C#HExnumber

EXAMPLE: DXM – 10 – 60 – RGBW – 60K – X – 36 – 10 – 24 – W

DOWNLIGHT SERIES

MODULAR PIXEL DOWNLIGHT

DXM SPECIFICATION


FIXTURE & DRIVER

ELECTRICAL	POWER CONSUMPTION OPERATING VOLTAGE OPERATING TEMPERATURE STORAGE TEMPERATURE	5W (Ø40MM OPTION) – 10W (Ø60MM OPTION) 24V DC -20°C TO 50°C (-4°F TO 122°F) -20°C TO 70°C (-4°F TO 158°F)
PHYSICAL	STANDARD FIXTURE DIMENSIONS (Ø40MM OPTION) STANDARD FIXTURE DIMENSIONS (Ø60MM OPTION) FIXTURE WEIGHT (Ø40MM OPTION) FIXTURE WEIGHT (Ø60MM OPTION) CONNECTORS IP RATING SOURCE LIFE HOUSING COLOUR FINISH	L: 65MM – TOP Ø: 45MM – BOTTOM Ø: 35MM (Ø40MM OPTION) L: 80MM – TOP Ø: 65MM – BOTTOM Ø: 55MM (Ø60MM OPTION) 0.15KG (Ø40MM OPTION) 0.30KG (Ø60MM OPTION) 5-PIN CONNECTORS IP20 / IP44 50,000 ≈ 70,000 HOURS AT 70% LUMEN MAINTENANCE AT 25° ALUMINIUM, BLACK, WHITE, CUSTOM RAL
OPTICAL	BEAM ANGLE COLOUR RANGE LUMEN OUTPUT	15° – 24° – 36° RGBW (2700K, 3000K, 3500K, 4000K, 5000K, 6000K) 225LM @RGBW FULL ON AT 25DEG LENS (5W) – 550LM @RGBW FULL ON AT 25DEG LENS (10W)
DIMING & CONTROL	CONTROL PROTOCOLS DIMMING RESOLUTION	LED-DOWNLIGHT DRIVER X-STREAM PROTOCOL WITH DATA REDUNDANCY AND SPI, DMX 8 BIT RESOLUTION DOING 65536 STEP WITH BUILT-IN GAMMA 2.2, 12-BIT, 14-BIT, 16-BIT.
DRIVER SPECS	POWER IN CONTROL PROTOCOL CONNECTION DIMENSIONS	24V DC SPI/UCS7604 WITH SPI BOOSTER 4-PIN SEETRONICS CONNECTORS FOR INPUT AND OUTPUT L: 124MM – W: 30MM – H: 20MM
FIXTURE RATING & CERTIFICATIONS	CE / IP20 / IP44	CE IP20 IP44
LIMITED WARRANTY	5 YEARS *Extendable warranty available	5


DOWNLIGHT SERIES | MODULAR PIXEL DOWNLIGHT

FIXTURE DIMENSIONS


Ø40MM OPTION

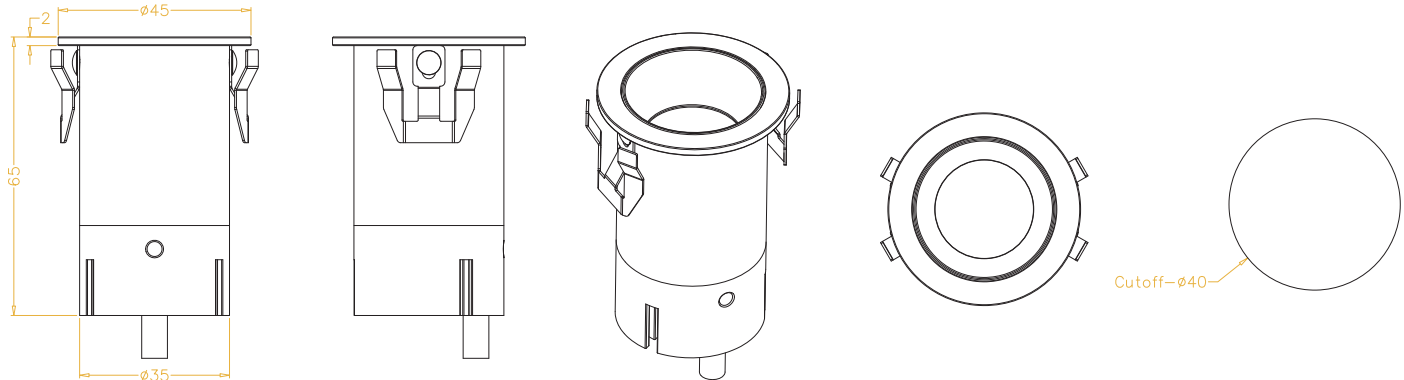

Ø60MM OPTION

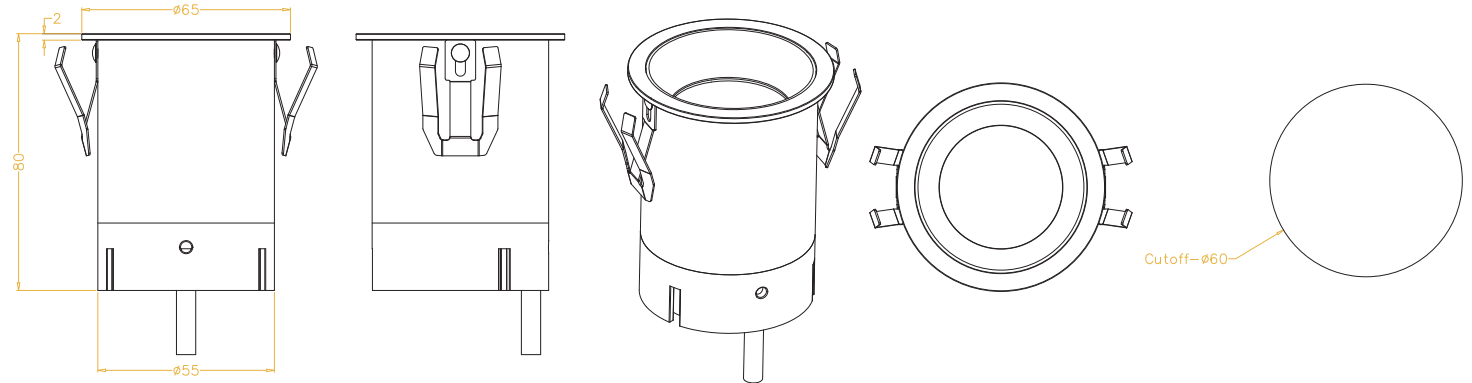


DOWNLIGHT DRIVER

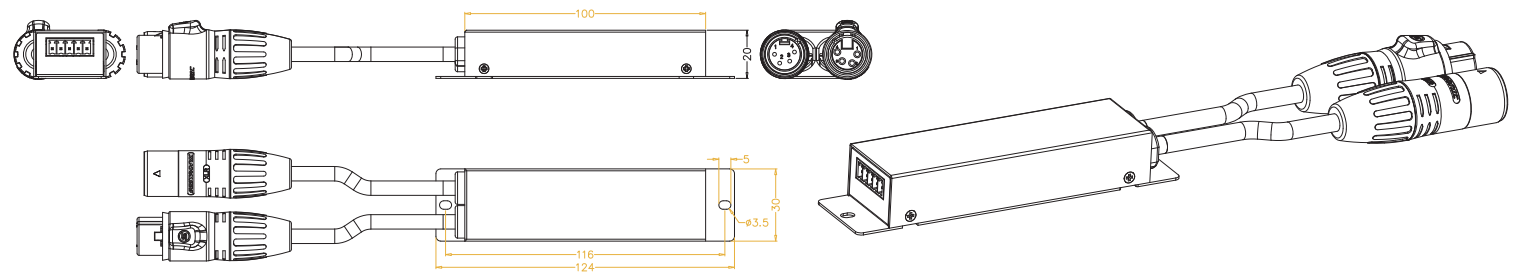


DOWNLIGHT SERIES | MODULAR PIXEL DOWNLIGHT

CABLES AND CONNECTORS


5 PIN DMX LINKING CABLE

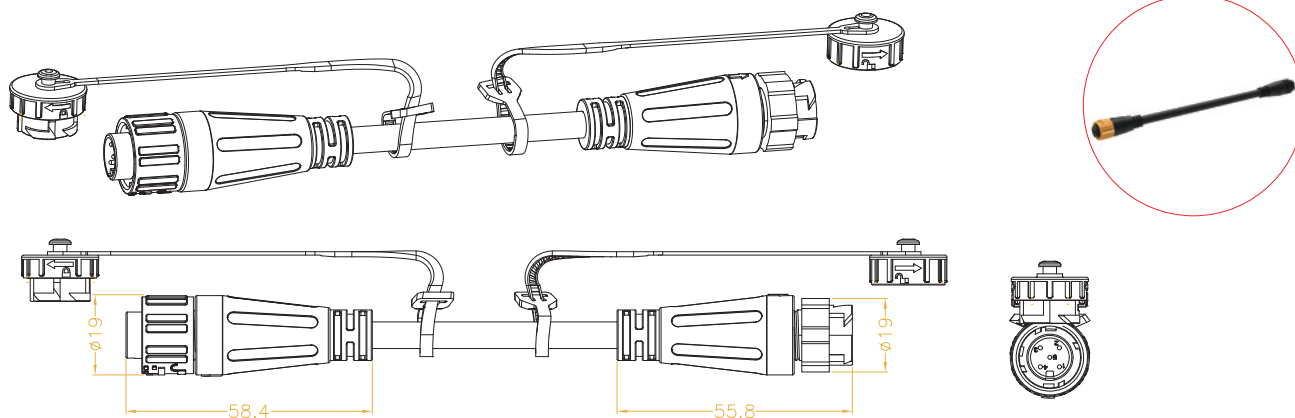

5 PIN DMX T-CABLE

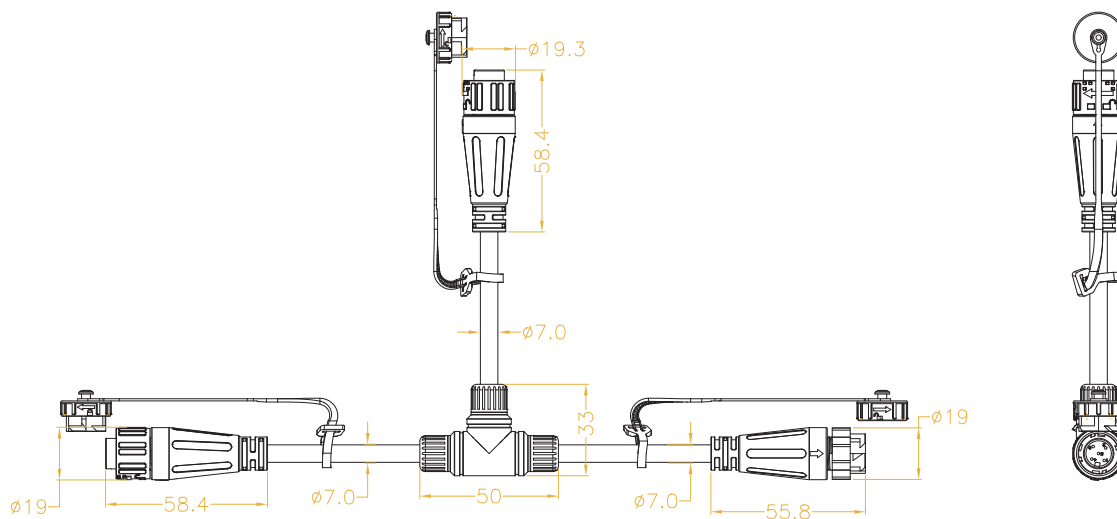

5 PIN DMX IP CONNECTOR

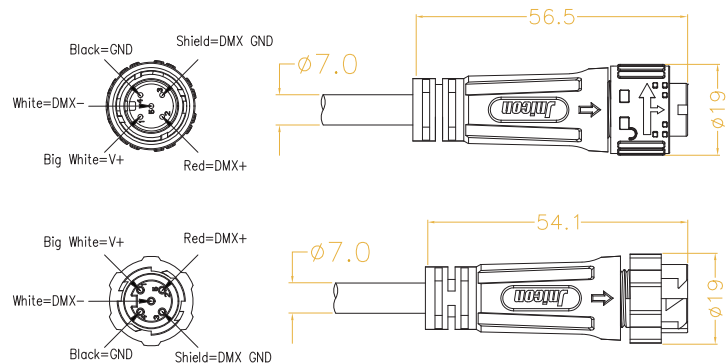

DOWNLIGHT SERIES


MODULAR PIXEL DOWNLIGHT

PXT/R BOOSTERS

The PXT and PXR work together as a transmitter/receiver pair to allow you to extend SPI signals up to 100 metres. The units convert the standard API signal to/from a differential pair to allow the signal to travel this distance while minimising interference.

Wide input voltage range allows support for many LED products, and the compact size makes it easy to accommodate in installations.

D1 and B1 inputs support standard data (D1) and backup data (B1) for pixel protocols supporting data redundancy.

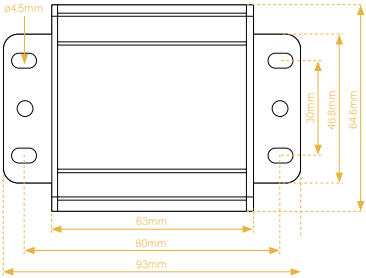

PXT TRANSMITTER	INPUT VOLTAGE AMP INPUT OUTPUT IP RATING	12V – 48V DC 6A MAX SPI OR X-STREAM FROM CONTROLLER OR LEDS X-STREAM DIFFERENTIAL SIGNAL IP20
PXT RECEIVER	INPUT VOLTAGE AMP INPUT OUTPUT IP RATING	12V – 48V DC 6A MAX X-STREAM DIFFERENTIAL SIGNAL SPI OR X-STREAM TO LEDS IP20

X-STREAM® COMMUNICAITON OPTIONS

X-Stream® technology is LED CTRL's premium communication platform, delivering high-speed data transmission, intelligent redundancy, and exceptional signal integrity across large-scale lighting installations. It is available in two configurations to suit different installation requirements.

X – X-Stream (EXTERNAL)

In the standard X-Stream configuration, all communication hardware sits outside the fixture. A PXT (Transmitter) and PXR (Receiver) pairs is mounted externally, converting the standard SPI signal to a differential pair for long-distance, interference-resistant data transmission.

- Communication distance up to 100 metres between fixtures.
- D1 and B1 inputs support standard and backup data for full signal redundancy.
- Wide input voltage range for compatibility across the LED CTRL product ecosystem.
- For longer runs, additional PXT/PXR pairs can be added at intervals to maintain signal integrity.
- Best suited for installations where external access to communication hardware is preferred, or where fixtures do not support internal integration.

XB – X-Stream Boosted (INTEGRATED)

X-Stream Boosted moves the signal repeating capability inside the fixture run, eliminating external hardware and simplifying installation. An external PXT transmits the signal to a PXR housed inside the product, which receives, processes, and re-transmits via a built-in PXT to the next fixture – effectively turning each boosted point into a signal relay.

- Eliminates external junction boxes and separately mounted communication hardware.
- Each boosted point fully regenerates the signal, preventing degradation over distance.
- Supports extended runs without compromising data quality.
- Cleaner installation with fewer visible components.

Integration depends on the product:

- High refresh rates (up to 16 kHz) further ensure stable, flicker-free performance and accurate colour rendering.
- Factory-integrated (e.g. LXB): The PXT/PXR hardware is built directly into the fixture, no additional components required.
- Dedicated boost housing (e.g. PUX): A purpose-built fixture shell, identical in form but without LEDs, houses the PXT/PXR pair. Placed at the beginning of each run and at intervals along longer runs, it integrates seamlessly without disrupting the visual continuity of the installation.

Both configurations share the same underlying X-Stream platform, ensuring identical signal quality, redundancy, and compatibility with LED CTRL controllers and fixtures.

DOWNLIGHT SERIES | MODULAR PIXEL DOWNLIGHT

X-STREAM® TECHNOLOGY

X-Stream® Technology is LEDCTRL's premium communication and power delivery platform, built on the advanced UCS7604 driver IC. It is designed to deliver high speed data transmission, exceptional reliability, and superior visual performance across large-scale and demanding lighting installations.

At its core, the system integrates intelligent signal processing, high-precision constant current control, and advanced error-detection mechanisms to ensure stable operation and consistent output, even in complex or long-distance configurations.

KEY FEATURES

Built-in Redundancy

X-Stream® incorporates dual-channel signal transmission with intelligent fault detection. In the event of a pixels or signal failure, the system automatically bypasses the faulty node and continues data transmission without interruption.

- Dual signal channels with real-time monitoring
- Automatic switching between channels in case of failure
- Fault identification accuracy greater than 99%
- No visible disruption during signal switching

This ensures continuous operation and eliminates single-point failures across the installation.

Auto-Addressing

Fixtures require no manual addressing or pre-configuration. Each unit automatically interprets incoming data, allowing for flexible installation and simplified maintenance.

- Plug-and-play installation
- No addressing sequence required
- Fixtures can be installed in any order

This significantly reduces installation time and minimises the risk of configuration errors.

High-Speed Communication

X-Stream® supports high-speed PWM data transmission, enabling smooth and dynamic lighting effects across long runs.

- Transmission speeds: 800 Kbps and 16 Mbps
- Supports high frame rates and fast data refresh
- Capable of filming environments up to 533 FPS without flicker
- Stable performance regardless of frame frequency

This ensures high-quality visual output suitable for media façades, dynamic content, and camera-facing applications.

Advanced Dimming Performance

The system supports multiple dimming resolutions, delivering precise brightness control and smooth transitions across the full output range.

- 8 / 12 / 14 / 16-bit dimming options
- Up to 65,536 levels of greyscale
- Built-in gamma correction (8-bit to 16-bit equivalent)
- Seamless dimming from 0% to 100%

High refresh rates (up to 16 kHz) further ensure stable, flicker-free performance and accurate colour rendering.

Signal Integrity & Reliability

X-Stream® integrates advanced anti-interference and signal enhancement technologies to maintain reliable communication in challenging environments

- S-AI anti-interference technology reduces radiation and conduction interference
- Enhanced signal receiving and transmission stability
- Consistent performance across varying environmental conditions
- Extended standard spacing between fixtures (>15 m)

These features ensure robust operation in large-scale and electrically complex installations.

Data Booster Technology

To support extended installation distances, X-Stream® incorporates data boosting capabilities both within fixtures and via external booster units.

- Extends communication distance up to 100 m between fixtures
- Maintains signal integrity over long data runs
- Supports large-scale linear and distributed installations

This allows for greater design flexibility without compromising system performance.

Long-Distance Power Distribution

X-Stream® systems are designed to support extended power runs through intelligent power management and integrated hardware.

- AC fixtures with built-in, replaceable power supplies
- High power factor for efficient energy distribution
- Managed startup and inrush current control
- Smart load regulation for stable operation
- Supports continuous runs of up to 96 m of linear product

This ensures reliable power delivery across extended fixture runs while maintaining system safety and efficiency.

System Overview

By combining high-speed communication, intelligent redundancy, and advanced signal processing, X-Stream® Technology enables the creation of large-scale, high-performance lighting systems with minimal installation complexity and maximum operational reliability.

Its integration of the UCS7604 chipset ensures that each fixture operates with precision, consistency, and resilience, making it suitable for demanding architectural, façade, and media lighting applications.